

JHS-770S/780D

VHF radiotelephone



– a first class VHF with an advanced modular design that allows for maximum installation flexibility

Direct call by AIS™

Easy operation with JOG dial

Intercom & loudhailer function

3.8" high brightness LCD screen

120 seconds recording

VHF series

– performance features

Unique features

- Available as semi-duplex or full-duplex, this class A VHF radiotelephone incorporates advanced modular design that allows for maximum installation flexibility.



Direct call by AIS™

When connecting your AIS to the new VHF, new possibilities become available. This innovative feature, unique to JRC, allows you with one push of the button, to quickly navigate through a list of targets in your surrounding area. Bearing, range and MMSI information of target vessels are sorted from the shortest range upwards. You can now easily select the vessel you wish to get in contact with, and send a DSC message immediately.

Intercom and loudhailer

The VHF radiotelephone has an intercom functionality for easy communication with multiple other VHF controllers onboard! Additionally, to always be in full control and on top of communication with deck or dock hands, a loudhailer function is built in. An optional external speaker with amplifier increases talk power, making your messaging loud and clear, thereby adding to the safety of the vessel.

Clear display

Improved visibility is realised by the integrated 3.8" high brightness silver LCD screen with excellent sunlight viewability. The main data is displayed in large characters for easy reading.

Extendable up to 5 controllers

The VHF series configuration allows having up to 5 controllers covering various important sections onboard. Additionally, there is a range of possibilities for connecting extra handsets and printers.

120 seconds digital recording

JRC has included a recording function for the last 120 seconds of open squelch (voice). In situations where loud engines or other background noises disrupt your reception, this characteristic feature enables you to immediately repeat any unclear messages.



VHF series

– developed for maximum ease of use

Wing controller

For wing and/or outside applications, JRC has developed an optional, simplified channel selector. This compact weatherproof unit allows basic operation, such as channel and power selection, and has a channel 16 preset.

Easy configuration

The JHS-770S/780D is developed upon maximum flexibility, having a separate transceiver and controller allowing flexible installation in confined spaces. Either panel, desktop or overhead mounting is possible with this size reduced VHF radiotelephone.



Easy operation

The combination of push buttons and JOG dial operation, together with JRC's innovative software including easy menu structures ensures logical, accurate and convenient operation.




Simplified squelch and volume operation

Direct call by AIS™

Easy JOG dial operation

StarNetwork™


JRC has been providing sales and support of products since 1915! Today, JRC offers comprehensive support through its organisation, in partnership with a world-wide StarNetwork™ of over 270 fully qualified agents, giving support 24 hours a day, 7 days a week, and 365 days a year!

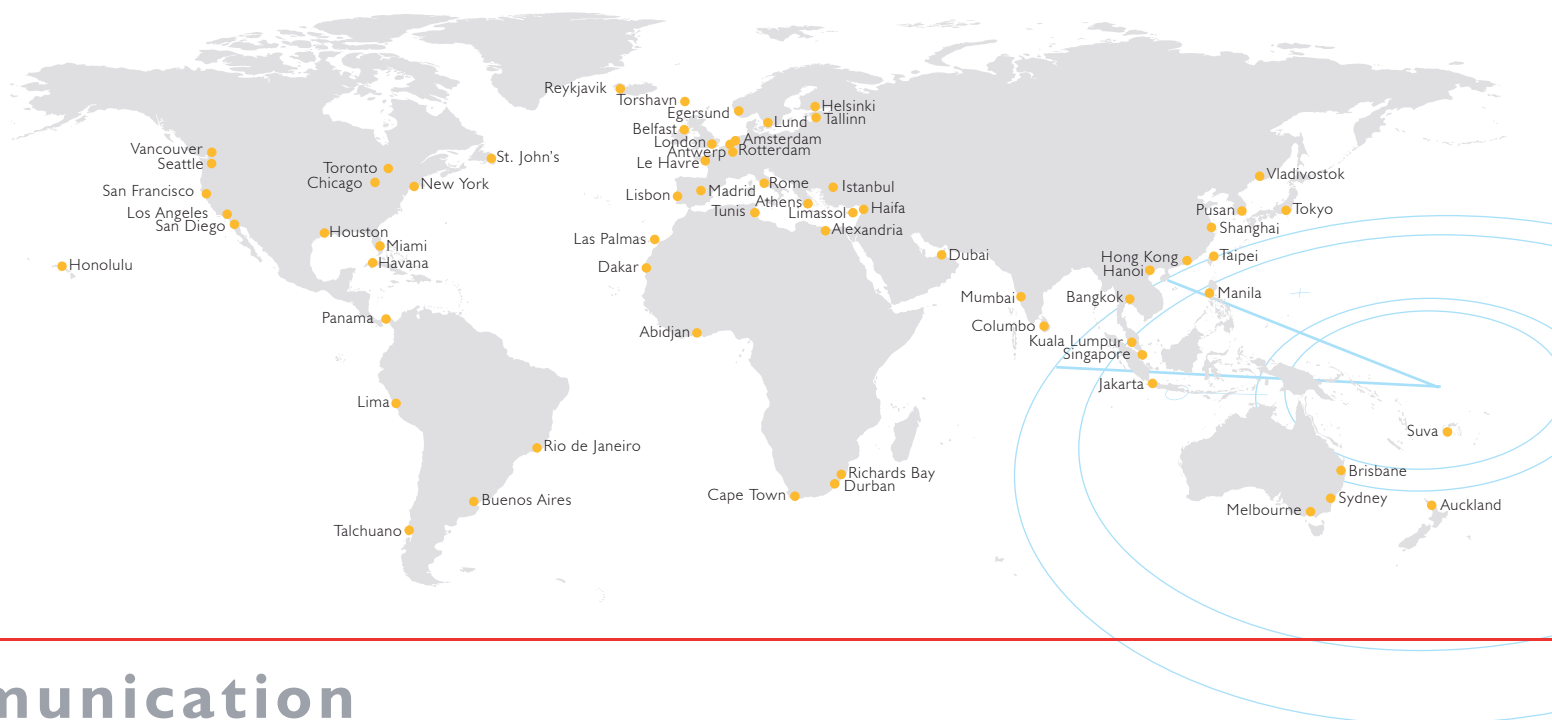

VHF series

– system flexibility


Configuration

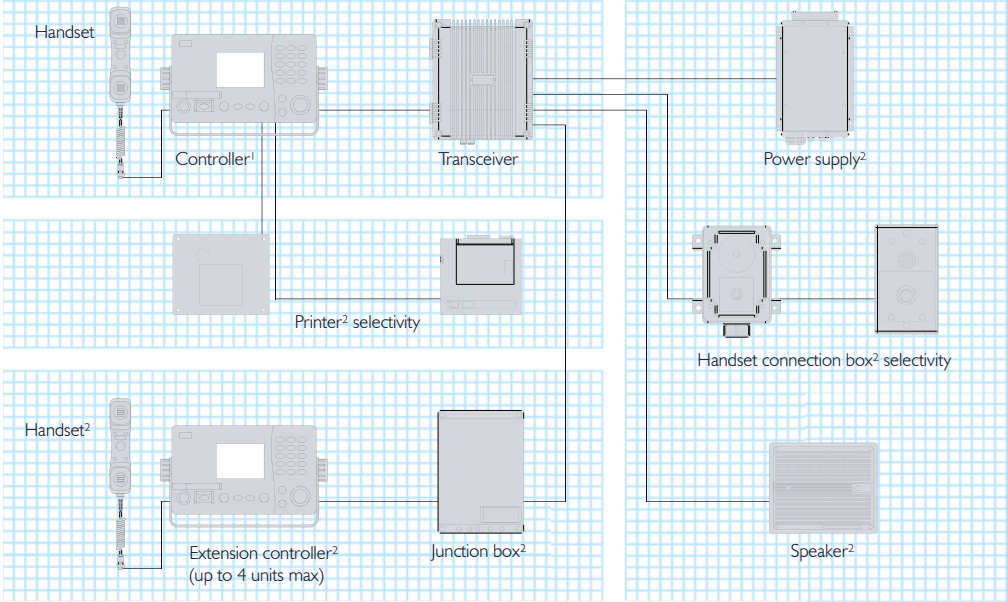


¹shown with optional bracket, ²optional products

Dimension drawings¹ - Power supply, Channel selector, Junction box


NBD-865
Weight 6 kg



NCM-2000
Weight 0,7 kg




NQD-2770
Weight 0,6 kg




Dimension drawings² - Handset connection box, Speaker


NQE-1846
Weight 1,5 kg



NQE-1847
Weight 0,3 kg




NVS-423
Weight 1,5 kg




Dimension drawings³ - Printer

NKG-91
Weight 0,75 kg



DPU-414
Weight 0,6 kg





¹,²,³ optional products

VHF series

– dimensions and weights

Dimension drawings - Controller

NCM-1770¹ Weight 2,4 kg


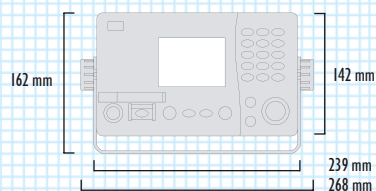


¹shown with optional bracket

Dimension drawings - Transceiver, Antenna


NTE-770S Weight 6 kg

NTE-780D Weight 7 kg

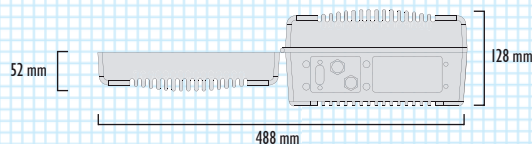



7ABJD0004

Weight 0,3 kg

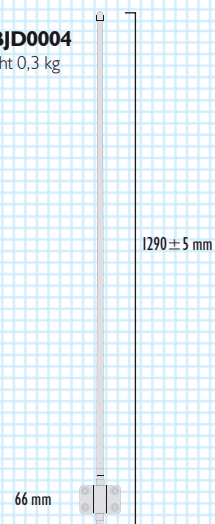

Dimension drawings - Handset

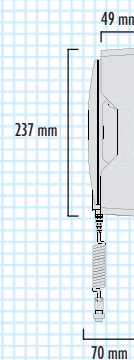

VHF series

– specifications

Model		JHS-770S	JHS-780D
GMDSS compliance		✓	
General			
	Communication mode	simplex/semi-duplex	simplex/duplex
	Frequency range	155.00 - 163.50MHz	
	TX	155.00 - 163.50MHz (simplex/semi-duplex), 156.00 - 157.45MHz (duplex)	
	RX	155.00 - 163.50MHz (simplex/semi-duplex), 160.60 - 162.05MHz (duplex)	
	Output power	25W/1W	
	Modulation type	radiotelephone G3E/F3E, DSC/ATIS G2B/F2B	
	Channel spacing	25kHz	
	Frequency accuracy	within ±10x10 ⁻⁶	
	Antenna impedance	50Ω unbalanced	
	DSC CH70 receiver	built in	
	DSC CH70 frequency	156.525MHz	
	DSC received message LOG	20 distress messages	
20(TX) + 20(RX) non-distress messages			
Channel capacity			
	ITU/USA/Canada	57 channels max	
	Inland Waterway	57 channels max	
	Private	200 channels max (channel steps: 25kHz, 12.5kHz, 10kHz)	
	Weather	10 channels max	
	Memory	10 channels max	
Inputs			
	IEC-61162-1	GPS	
	IEC-61162-2	AIS	
Outputs			
	IEC-61162-1	VDR/S-VDR	
	Audio	600Ω 0db inbalanced (to VDR/S-VDR and ext. loudspeaker)	
	RS232C	for external printer NKG-91 and DPU-414	
Environmental conditions			
	Power voltage	DC 24V +30% -10%	
	Current consumption	DC 24V input, 8.3A max	
	Ambient condition	temperature: -15°C +55°C (range for full performance 0°C +40°C)	
Optional items			
Power supply unit		NBD-865 (for AC operation)	
Remote VHF controller		NCM-1770 (with handset, holder and cable)	
VHF channel selector		NCM-2000	
Controller junction box		NQD-2770	
Console mounting kit		MPBC39314 (for NCM-1770)	
Controller bracket		MPBX41872	
Handset		NQW-261 (with cradle)	
Handset connection box		NQE-1846	
Handset connection box (waterproof)		NQE-1847	
Printer (table mount)		DPU-414	
Printer (flush mount)		NKG-91	
External speaker (wall mount)		NVS-423	
External speaker (flush mount)		NVS-423A	
Extension board		CQD-7701 (required for multiple controllers)	

All specifications are subject to change without notification.

For further information please contact:



Japan Radio Co., Ltd.

JRC Amsterdam branch
 Cessnalaan 40-42
 1119NL Schiphol-Rijk, The Netherlands
 Telephone: +31 20 6 580 750
 Fax: +31 20 6 580 755
 E-mail: sales@jrcams.nl
 Web: www.jrcams.nl